

JY-TECK A-TYPE RATIO METER SERIES

FEATURES:

- * DIN SIZE 48x96mm, SHORT HOUSING, EASY ASSEMBLY OR MAINTENANCE.
- * AUTOMATIC IN-PUT SIGNAL POLARITY INDICATION.
- * BRIGHT LED DISPLAY FOR OBVIOUS READING.
- * LSI I.C. FOR STEADY INDICATION AND ACCURACY.
- * BUILD-IN QUARTZ TIME-BASE CIRCUIT.
- * DISPLAY "1888" OR "18888" RAEDING WITH BROKEN LINE INDICATION OF ZERO SIGNAL.
- * EXTERNAL ADJUSTABLE SPAN ON FRONT PANEL.



APPLICATIONS:

- * FLOW METER.
- * LEVEL METER.
- * INSTRUMENTS.
- * THERMAL METER.
- * PRESSURE METER.


GENERAL SPECIFICATIONS:

SAMPLING RATE	3 TIMES / SECOND (A153-SERIES).
TIME BASE	40 KHz (A153-SERIES).
ACCURACY	≤0.05% ± 1 Digit.
BROKEN-LINE INDICATION	DISPLAY "1888" (A153-SWRUES)
DISPLAY	0.56" HIGH RED LED DISPLAY.
POWER SOURCE	AC110/220V ± 15% .50/60 Hz.
POWER CONSUMPTION	≤2.0 WATT.
OPERATING TEMPERATURE	0~50 °C.
OPERATING HUMIDITY	0~85 %.


SPECIFICATIONS:

PART NO.	DIGIT	IN-PUT SIGNAL	DISPLAY	RESOLUTION	IN-PUT IMPEDANCE
A153A10D	3.5 DIGIT	4.0-20.0 mA/DC	0.1-100.0%	0.1%	≅ 10.0 ohm
A153CUSD	""	""	OPTIONAL BY CUSTOMER	-----	-----

ZERO / SPAN ADJUST V . R . (UNDER PANEL COVER) :

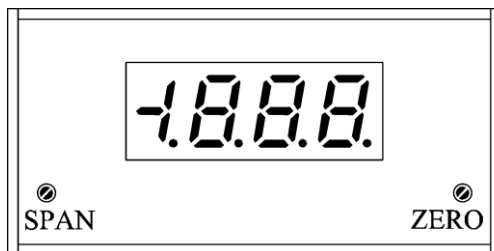

TERMINAL & WIRING (BACK VIEW):

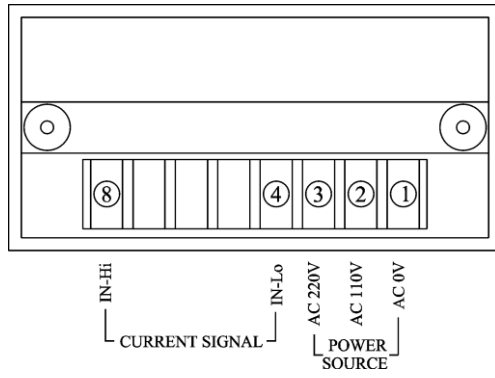

DIMENSIONS & PANEL CUT-OUT AREA (Unit: m/m.):

